

Wi-Fi Smart Plug with Energy Monitoring Model: LA-WF7 ITM.: 1228999



Quick Start for CE Smart App

1. Use your mobile device to scan the QR code below or search for "CE Smart" in the App Store or on Google Play to download and install the App. For iPad's select "iPhone Only" option in the App Store to locate CE Smart App.




2. Connect mobile device to your 2.4GHz Wi-Fi network. Please note this Smart Plug can only be connected via a 2.4GHz network.




3. Launch CE Smart and follow the in-app instructions to connect the Smart Plug to your network.


- a. Register/Log in to CE Smart using email or phone #

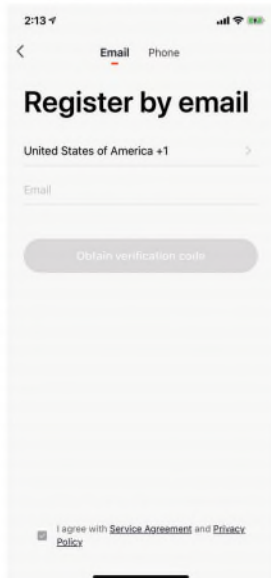


- b. Create Home

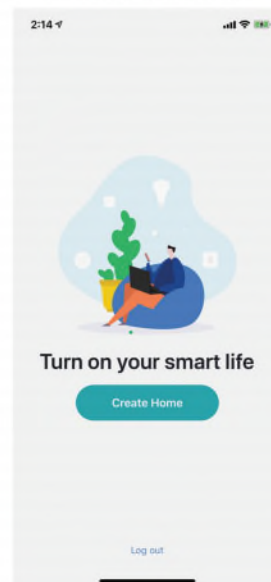


- c. Tap Add Device or "+" sign

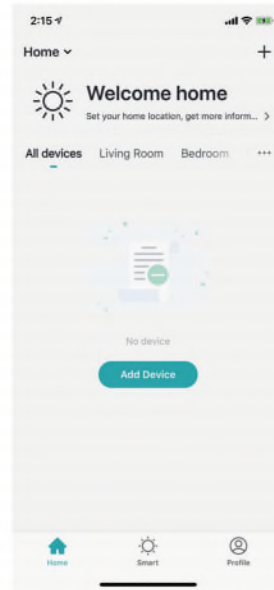


- d. Select type of devices

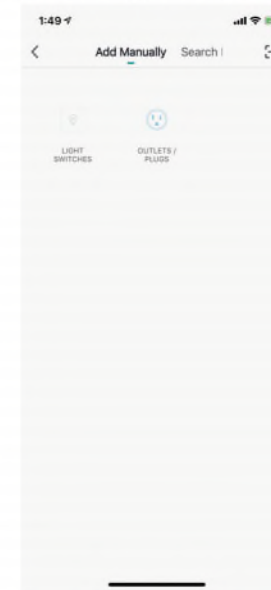


- e. Confirm Rapid Blink or Tap "Help"

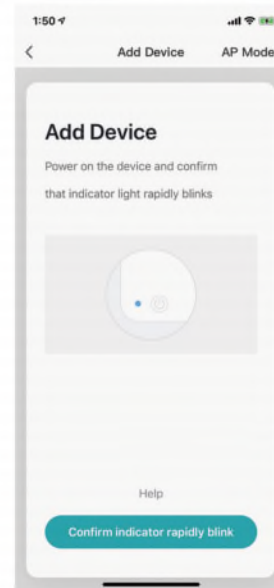


- f. Enter 2.4GHz Wi-Fi password

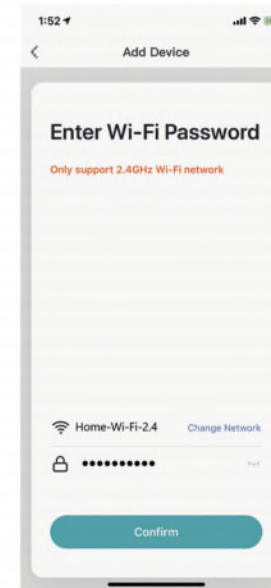


- g. Connecting device

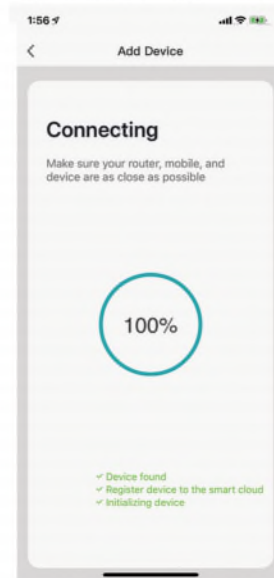


- h. Edit Name or Tap "Completed"

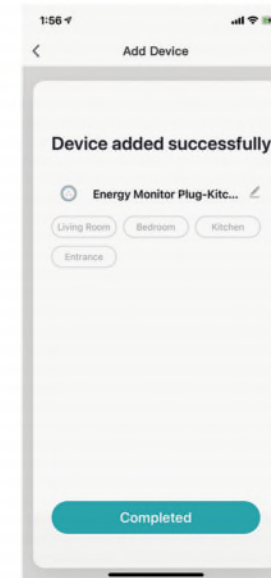


- i. Device Home Screen

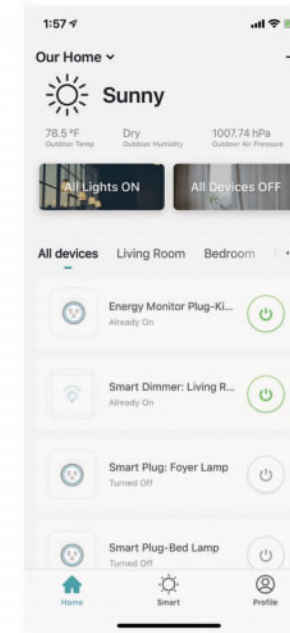

- j. ON/OFF Control

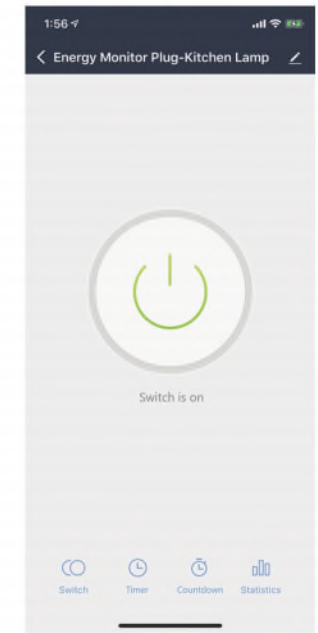

Wi-Fi Smart Plug:

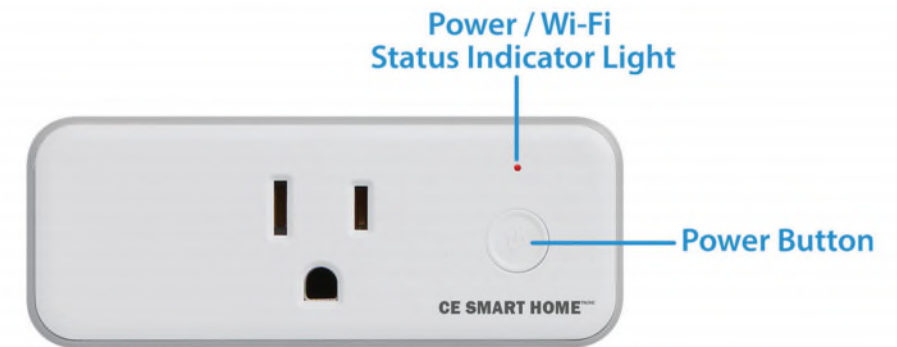

CE Smart App Reference Guide:

For additional information and the detailed CE Smart App Reference Guide, please visit our website at www.CESmartHome.com.

Add Device + Normal Mode (Default Method)

- Tap "Add Device" or the "+" in the upper right corner of the screen to enter device connection page.
- Select Device Type: Select "Outlet/Plugs".
- There are two Wi-Fi network connection methods (Normal Mode and AP Mode.) Normal Mode is the default and connects via your 2.4GHz Wi-Fi channel only. (Does not work with 5GHz channel.) Normal mode allows you to connect several CE Smart devices at the same time.
- For Normal Mode, please make sure the indicator light on the plug is set to flashing rapidly (2 times per second).
- To set quick flashing connection mode, press Wi-Fi power button to turn on device, press again to turn off device.
- Press the Wi-Fi power button and hold for 10 seconds until blue indicator light starts rapid flashing. If steady red light turns on, press and release the button to get blue light quickly flashing.
- Tap "Confirm indicator rapidly blink."
- Enter your 2.4GHz Wi-Fi password and tap "OK" to enter the device connection process.
- Device Connection Process will begin and connect device.

AP Mode (Access Point)

- Tap "AP Mode" in upper right screen.
- Connect your phone to 2.4GHz Wi-Fi.
- In AP Mode your device broadcasts a device name in your phone's Wi-Fi settings that allows the Wi-Fi device to connect to your network. AP mode allows you to connect devices one by one. Use this alternate method if not able to connect the device to your network in Normal Mode.
- Make sure the device's indicator light is slowly flashing (1 time every 3 seconds). Press Wi-Fi power button to turn on device, press again to turn off device. Press and hold Wi-Fi power button for 10 seconds to set blue indicator light to fast flashing. Press and hold again until blue indicator light slowly flashes.
- Tap "Confirm indicator slowly blink".
- Enter your 2.4GHz Wi-Fi password and tap "OK."
- Tap "Go Connect" to Open Wi-Fi Settings to locate Device's Access Point Wi-Fi name.
- Locate then Tap to Connect to the Wi-Fi device name, i.e. CE Smart_XXXX.
- Go back to CE Smart app.
- Device Connection Process will begin and connect device.

Not all Wi-Fi installations are the same. If you are having trouble connecting your device, please ensure your phone/tablet being used to connect the device is connected to your 2.4GHz Wi-Fi band only. Try connection in both Normal Mode and AP mode. Visit our website, www.cesmarthome.com, for FAQs and help troubleshooting.

After you have successfully set up the CE Smart app and your device(s) you may control them remotely from your mobile device using a Wi-Fi or Cellular connection.

Works with Amazon Alexa, the Google Assistant and Siri Shortcuts.

LED INDICATOR LIGHT ON SMART PLUG

- Solid Red: The Smart Plug is switched on.
- Quick Flashing in Blue: Connecting to network in Normal Mode.
- Slow Flashing in Blue: Connecting to network in AP Mode.
- Solid Blue: Connected to network.

SPECIFICATIONS

Maximum Input Voltage (VAC)	125 VAC
Nominal Input Frequency (Hz)	60Hz
Maximum Output Power (Watts)	1875W
Maximum Line Current (Amps)	15A
Indoor	Indoor Only
Network Requirements	Wireless router supporting 2.4 GHz wireless band
Smart Device Compatibility	Remote Control Devices using Cellular Data or Wi-Fi
	Android™ smartmobile device running Android™ 4.2 or above
	iPhone/iPad running iOS 8 or above
	CE Smart App 2.3.0 or higher
Certifications	ETL & CETL Listed, FCC, IC
Standards	Conforms to UL STD 60730-1 and 498A
	Certified to CSA STD E607301-1 and C22.2#42
FCC ID	FCC ID 2AMQ8-WIFI-010
IC	IC ID 23878-WIFI010

FCC Compliance:

This device complies with part 15 of the FCC rules and the Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. This device complies with RSS-247 of Industry Canada. Operation is subject to the condition that this device does not cause harmful interference.

Changes or modifications not expressly approved by the party responsible for

compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the antenna of this device and your body.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the antenna of this device and your body.



WARNINGS

Plug directly into a standard grounding 15A wall receptacle (not into an extension cord or wall tap.) Unit is not intended for use with 20A or GFCI wall receptacles.

Risk of Electric Shock

- DO NOT overload.
- DO NOT use in wet or damp locations.
- Keep children away from Wi-Fi plug, outlets and cords.
- For indoor use only.
- Fully insert plug. NOT for use with bulky or heavy plugs.

Risk of Fire

- DO NOT exceed recommended electrical ratings.
- DO NOT overload. Fully insert plug. Make sure plug connection is secure.
- A loose-fitting connection may cause the plug to overheat.
- DO NOT use with extension cords.
- DO NOT remove ground pin (middle pin.)
- DO NOT use with precision timing devices where inaccurate timing could be dangerous.
- DO NOT use with devices that should not be operated unattended (heaters, burners, etc.)

LIMITED 1 YEAR MANUFACTURERS WARRANTY: ALL CHARGING ESSENTIALS PRODUCTS MUST BE INSTALLED AND USED IN ACCORDANCE WITH THEIR INSTRUCTIONS, INCLUDING INSTRUCTIONS PROVIDED WITH THE CHARGING ESSENTIALS PRODUCT PACKAGING OR PROVIDED ON THE PRODUCT ITSELF. AT THE DISCRETION OF CHARGING ESSENTIALS ANY DEFECTIVE PRODUCT WILL BE REPLACED OR THE PURCHASE PRICE REFUNDED. THIS WARRANTY SHALL IN NO EVENT EXCEED AMOUNTS PAID BY CUSTOMER TO CHARGING ESSENTIALS OR ITS AFFILIATES FOR THE CHARGING ESSENTIAL PRODUCTS INVOLVED, AND EXPRESSLY EXCLUDES COVERAGE OF ANY DAMAGE TO FIXTURES, LAMPS OR THIRD PARTY PRODUCTS OR ELECTRONICS.

CUSTOMER SERVICE: 1-877-941-2525
M-F 9:00 a.m. - 4:00 p.m. Central time/English, French

Email: Visit www.CESmartHome.com and click "Contact us" to submit a ticket.

Made in China

All trade names are registered trademarks of respective manufacturers listed. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries. Apple, the Apple logo, Siri Shortcuts, iPad, iPhone, and iPad touch are trademarks of Apple Inc., registered in the U.S. and other countries. Google, Android, and Google Play are trademarks of Google LLC. Amazon Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Wi-Fi® is a registered trademark of Wi-Fi Alliance®.